


SIDE DUMP EVOLUTION

Durability, Versatility, Reliability.... For ANY Load

One of the MOST Stable Trailers on the Market Today!

No Center Divider, Trunnion Mounted Inverted Cylinder & External Supports provide for unprecedented stability!

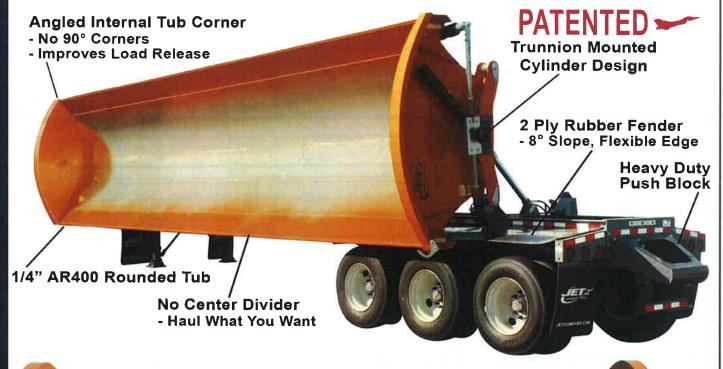



Quality You Can Count On.... Experience You Trust!



Ideal for Construction, Commercial & Agricultural Use Large Tub Siderail Maximizes Strength Self-Lubricating Tub Pivot Bushings Reduce Maintenance Long Lasting LED Lights with Sealed Wire Harness


External Tub Supports (No Center Divider)


Blasted Paint Preparation for Maximum Paint Adhesion

AR400 Steel Tub

Durable Chip Resistant Primer & Polyurethane Full Gloss Paint

TRAILER SPECIFICATIONS

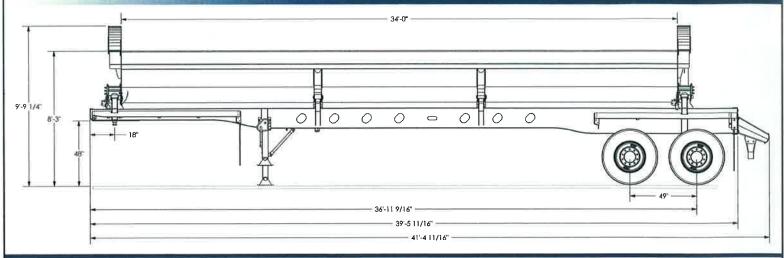

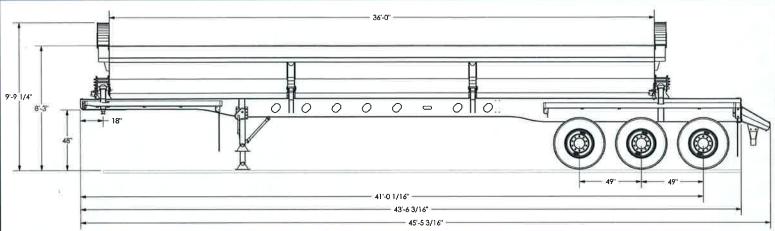

Width:

Tub Capacities:

34' Tub: 21 Cubic Yards Waterfull

31 Cubic Yards Heaping

36' Tub: 22 Cubic Yards Waterfull

33 Cubic Yards Heaping

1/4" Thick AR400 Steel **Tub Construction:**

Rounded Tub

No Center Divder

Angled Internal Corners

Frame Construction:

High Strength Fabricated Steel I-Beam

2 Speed Landing Leg

Bumper:

Bolt-On Push Bumper

Tub Pivots:

Self-Aligning, Self-Lubricated,

Maintenance Free Bushings

Plated Pivot Pins

Hydraulics:

PATENTED Trunnion Mounted Cylinder Design

5" Diameter Bore Cylinders

3000psi Rated Hydraulic Components

Proportional Flow Divider

Suspension:

Air Ride (23,000# rated)

Axles:

Hub Pilot Grease Lube Axles

Axle Beam Rated at 25,000#

Wheels:

8.25 x 22.5 Steel

Tires:

11R22.5 Radials

Brakes:

16 1/2" x 7" 2S1M Anti-lock Brake System

Fenders:

Bolt on Front and Rear 2 Ply

Rubber Flexible Edge

Sloped to Release Debris

Mudflaps:

Ultra Rubber with JET logo (front & rear)

Electric:

LED Low Profile/High Impact Lights

Sealed Lights/Wire Harness

Paint:

Yellow Tub; Gray Frame (other color options available)

Options:

Tandem or Triple Axle Spacing Options

Lift Axle

Electric Tarp System Aluminum Wheels

Trailer Mounted Directional Control Valve

Tub Extension

Part #111514

*2 Directional Hydraulics Required for Operation / 25-30 GPM / 2200 - 2500 PSI

Notice: All dimensions, specifications and pictures contained in this literature are based on the latest product information available at that time. To insure product improvement, Jet Company reserves the right to make any changes or discontinue models at any time without notice. Jet trailers conform to all DOT regulations in effect at the time of manufacture.



1303 North 13th Street - Humboldt, Iowa 50548 Phone: 515-332-3117 Fax: 515-332-5092

jet@jetcompany.com www.jetcompany.com